

FUSION NEON 1515H DYN 26W/M IP67 HE

NGA/LL/NF/1515/H/26/DYN/27-65/67/HE

LED SPECIFICATION SHEET

PRODUCT DESCRIPTION




This High Output High Efficiency Dynamic White Neon Flex features a square cross-section and is designed for flexibility and style. It delivers high-quality, uniform illumination with smooth white tuning and energy-efficient performance for modern, sustainable lighting applications.

PRODUCT NOTES

- Fusion Neon is typically supplied in custom cut lengths, but can also be supplied in reels up to a maximum length of 5m, with cables at both ends.

- The product is supplied with 5 mounting accessories per meter as standard, or available with an aluminium mounting channel upon request.

- When unreeling NGA's Neon Flex, two people must work together no more than 1.5 m apart. One supports the reel while the other feeds the Neon out for installation. This prevents twisting and protects the internal LEDs.

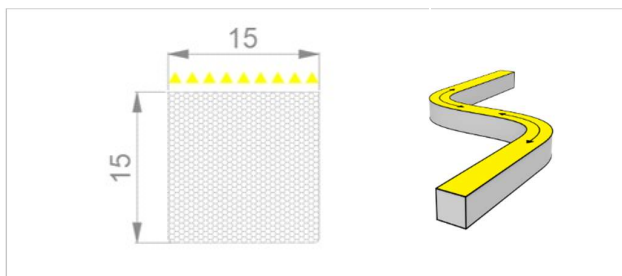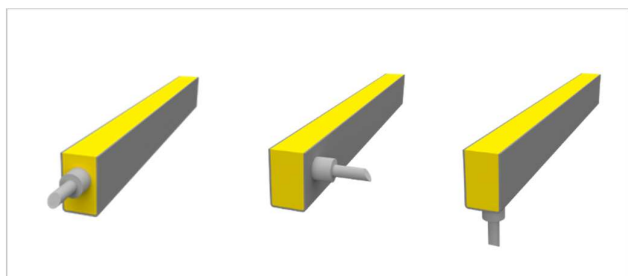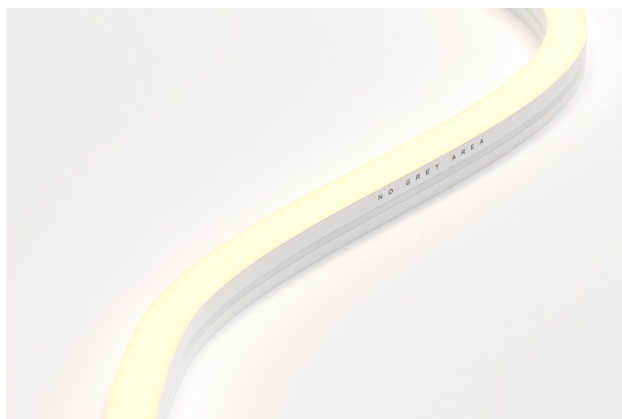

TECHNICAL INFORMATION

| | |
|--------------------|-------------------------------------|
| Product Code | NGA/LL/NF/1515/H/26/DYN/27-65/67/HE |
| Product Group | Neon Flex |
| Bend Direction | Horizontal |
| Power Consumption | 26W/m |
| Supply Voltage | 24V DC Constant Voltage |
| Lumen Output | 27K: 1153 65K: 1290 MAX: 1290 lm |
| Efficacy | 99lm/W |
| Colour Temperature | 2700K-6500K |
| CRI | Ra>90 |
| MacAdam Step | <3SDCM |
| Lifetime | 50000hrs |
| Cutting Interval | 62.5mm |

| | |
|-----------------------|-------------------------------|
| Dimensions | W 15mm x H 15mm |
| Mounting Clip Dims. | L 35mm x W 19mm x H 19mm |
| Alternative Mounting | 1m Channel / Bendable Channel |
| Bending Diameter | ø≥250mm |
| Cable Entry | End / Side / Rear |
| Max Run Length | 3m |
| Control Gear | 0-10 / DALI / DMX |
| IP Rating | IP67 |
| IK Rating | IK08 |
| Operating Temperature | -40°C to 55°C |
| Beam Angle | 120° |
| Protection Class | III |

EUROPE & AMERICA HQ
T: +44 (0) 1276 686175 | E: info@nogreyarea.co.uk

MENA REGION HQ
T: +971 (0) 433 38300 | E: info@nogreyarea.me | www.no-grey-area.com

NGA